

Model NO. : SSL-06R

Arg

es series Solar Street Lights 3000Lumens

Intelligence/Efficiency/Energy Saving

Application: High way/Park/Street/Roadway/Parking

Lot/Public square/ plaza/Campus/Airfield/Farm &

Ranch/Remote Area/Military Base/Government

project for special use

Categories: [Solar Street Light](#)

www.usaemergencysolarenergy.com PH+1-303-634-2208

Fax: +1-303-634-2208 Email: sales@usaemergencysolarenergy.com



www.usaemergencysolarenergy.com PH+1-303-634-2208
Fax: +1-303-634-2208 Email: sales@usaemergencysolarenergy.com

<p>Features:</p> <p>1.Smart Remote Control Function to satisfy different Customer use.</p> <p>3 Main Lighting mode as below</p> <p>1). Constant Brightness all the time (100%/60%/30%/10%)</p> <p>2). Dim lighting + Motion sensor (30 seconds 60% High brightness)</p> <p>3). Timer lighting Mode (6 Option)</p> <p>2.Adaptive Lighting System to achieve all night lighting when Weather change. Constant current output!</p> <p>3.VFT(Variable Frequency Technology) to Control and adjust the LED driver frequency to reach the max output of LED and Battery</p> <p>4TCS (Temperature Control System) to Protect the battery charging and discharging in high temperate</p> <p>5.10 Hour full charge the battery by standard Sunlight, Once the battery are full charged, it can support 3 night lighting.</p> <p>6.SSC LED chip, 160 lumen/W</p>		price per unit	100 pcs Price			
		us\$310.55 BUY NOW	us\$299.5 BUY NOW			
LED	3000Lumens 40 LEDs 6500K	Lighting mode				
Li-ion battery	115.4WH ,14.8V	<p>3 Main Lighting mode as below</p> <p>1. Constant Brightness all the time (100%/60%/30%/10%)</p> <p>2. Dim lighting + Motion sensor (30 seconds 60% High brightness)</p> <p>3. Timer lighting Mode (6 Option)</p>				
Solar Panel	15W, 18V					
Install height	3~4 meters					
Waterproof	IP 65	<p>Application:</p> <p>Courtyard/Garden/ Park/Street/Roadway/pathway/Parking Lot/Private road/Sidewalk/Public square/ plaza/Campus/Airfield/Farm & Ranch/Perimeter Security/ Wildlife area/Remote Area/Military Base</p>				
Solar charging time	9~10 hours by bright sunlight					
Lighting time	More than 3 nights					
Material	Aluminium alloy + tempered glass	<p>Packing details:</p> <p>Retail packaging: 27*19.5*85CM</p> <p>Carton size: 42*29*88CM</p> <p>QTY/CTNS: 2PCS</p> <p>G.W/CTNS: 16.5KG</p> <p>www.usaemergencysolarenergy.com PH+1-303-634-2208</p> <p>Fax: +1-303-634-2208 Email: sales@usaemergencysolarenergy.com</p>				
Size	808*227*164mm					
Warranty	3 years					

www.usaemergencysolarenergy.com PH+1-303-634-2208 Fax: +1-303-634-2208 Email: sales@usaemergencysolarenergy.com



www.usaemergencysolarenergy.com PH+1-303-634-2208 Fax: +1-303-634-2208 Email: sales@usaemergencysolarenergy.com





www.usaemergencysolarenergy.com PH+1-303-634-2208
Fax: +1-303-634-2208 Email:
sales@usaemergencysolarenergy.com

www.usaemergencysolarenergy.com PH+1-303-634-2208 Fax: +1-303-634-2208 Email: sales@usaemergencysolarenergy.com



• PRODUCTS DETAIL

•

Main Features:

- 1.Design: Big solar panel, Battery, LED panel are all in One Integrated Design
- 2.Solar panel: High efficiency Glass Lamination panel
- 3.LED: South Korea imported LED Chip SSC,140 lumen/W
- 4.Battery : A graded Li-ion battery No.18650
- 5.PIR :Motion sensor distance over 7M
- 6.Remote controller : Adjust brightness ,lighting time and lighting mode

Technology: three core Intelligence technology to improve brightness 30% and save power 50%

www.usaemergencysolarenergy.com PH+1-303-634-2208


Fax: +1-303-634-2208 Email: sales@usaemergencysolarenergy.com

Working process instructions

www.usaemergencysolarenergy.com PH+1-303-634-2208 Fax: +1-303-634-2208 Email: sales@usaemergencysolarenergy.com

Use the supplied key pin to click the "on/off" socket to unlock the battery

Please fasten the light to the pole by the bolt

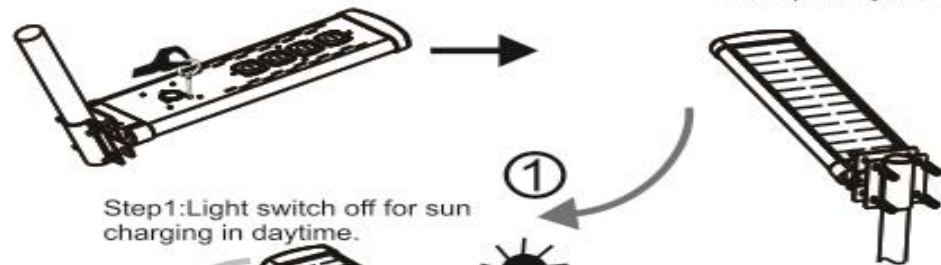

Step1: Light switch off for sun charging in daytime.

Step2: When the first time use, at night, press the button "on" by remote controller to turn on the lamp, it will be the default lighting mode (M2) --- 10% dim light when no people around + PIR sensor 60% brightness for 30s, then turn to dim light again.



Step4: After set M1 or M2 neutral lighting mode, if you need to set other lighting mode please see the remote controller manual for instruction.
Notice: If set other lighting mode (brightness and timer mode), the lamp will have memory function. In the next day it will work with the same lighting mode as we set up, and after the time is over, then it will turn to default lighting mode M2.



Step3: Use remote controller to choose M1 or M2 two neutral lighting mode
M1 (15%+PIR): 15% dim light when no people around + PIR sensor 60% brightness for 30s, then turn to dim light again.
M2 (10%+PIR): 10% dim light when no people around + PIR sensor 60% brightness for 30s, then turn to dim light again.
Notice: After choose M1 or M2, if donot press other button, it will keep the same mode the second day.