

Model NO. : SML-04

Solar Pullswitch Wall Light 1000 Lumens

High quality/Efficiency/Energy Saving

Application: Courtyard/Garden/ garage door/
warehouse/stable/gateway/escape trunk/corridor etc

Categories: [Solar Motion Wall Light](#)



Features: Aluminum Alloy Case, Separate Solar panel for outdoor easy mounting. 3.5 Meters cable. 1000Lumens Super-bright LED light Replaceable and Rechargeable Li-ion Battery Sensitive PIR Motion Sensor 100% Solar powered, Green energy, Green Light Waterproof IP65 Adjustable bracket for lamp and solar panel for high efficiency Wide Lighting Area		price per unit	500 pcs			
		us\$94.35 BUY NOW	us\$78.45 BUY NOW			
LED	1000Lumens,6000K±500K	Lighting Mode				
Li-ion battery	8000mAh 3.7V	Dim lighting 50 lumens +motion sensor (Bright lighting 1000 lumens for 30secs when people move through the light)				
Solar Panel	5W, 10years span life.					
Install height	2.5~3.5 meters	Application: Courtyard/Garden/ garage door/ warehouse/stable/gateway/escape trunk/corridor etc				
Waterproof	IP 65					
Solar charging time	9 hours by bright sunlight					
Lighting time		Packing details: Retail packaging 27.5*W13.5*H19 cm Carton size: L56*W29*H40 CM QTY/CTNS: 8 PCS G.W/CTNS: 17.9KG				
Material	Aluminum Alloy Toughened glass					
Size	242.5*120.5*92mm					
Warranty	1 year					









- **PRODUCTS DETAIL**

-

Main Features:

1. Design: Solar panel, Battery, LED panel are all in One
2. Pull switch: adjust the brightness and lighting time
3. Solar panel: High efficiency monocrystalline silicon
4. LED: High quality LED 120 lumen/W
5. Battery: A graded Li-ion battery No.18650
6. PIR: Motion sensor distance 3M
7. Waterproof: IP65
8. Material : Aluminum Alloy + Tempered Glass

Working process instructions

ON/OFF function:
ON: Inter dim light + PIR
OFF: turn off lighting system




Fix the lamp on the wall
by the supplied screws



Step1: The lamp turn off for
sun charging in daytime




Step2: The lamp turn on
1000LM high light for 30S
delay when people come
3-5M near

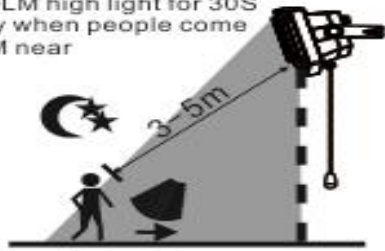

Step4: When in on situation, the
pull switch function in below cycle:

1. Dim light + PIR 1000LM 30S
2. 100%: 1000LM
3. 50%: 500LM
4. OFF

Four choices in cycle
with memory function

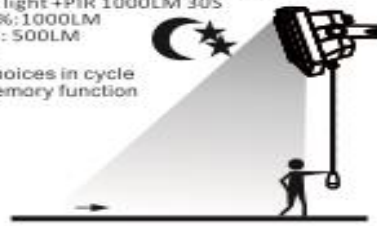

Step3 : When people
leave 3-5M away, it will
turn on dim light again.

