

Model NO. : SSL-40

Big power Solar Street Lights 4000Lumens

High quality/Efficiency/Energy Saving

Application: High way/Park/Street/Roadway/Parking

Lot/Public square/ plaza/Campus/Airfield/Farm &

Ranch/Remote Area/Military Base/Government

project for special use

Categories: [Solar Street Light](#)

www.usaemergencysolarenergy.com PH+1-303-634-2208

Fax: +1-303-634-2208 Email: sales@usaemergencysolarenergy.com



www.usaemergencysolarenergy.com
PH+1-303-634-2208 Fax: +1-303-634-2208 Email:
sales@usaemergencysolarenergy.com

Features:
Elegant Integrated Design, Aluminum alloy case
Super-bright LEDs, 4000Lumens
Every element can be easily replaced by users
Over 140° wide lighting angle
Support 3 nights lighting time
Easy to install

| | | | | |
|--------------------------------------|-------------------------------------|--|--|--|
| price per unit | 100 pcs Price | | | |
| us\$1035.23 BUY NOW | us\$995.34 BUY NOW | | | |

| | |
|------------|------------------------------|
| LED | 4000Lumens,6000K±500K |
|------------|------------------------------|

| |
|----------------------|
| Lighting Mode |
|----------------------|

| | |
|----------------|-----------------|
| Li-ion battery | 461.76WH, 22.2V |
|----------------|-----------------|

| |
|---|
| 5Hrs 100% light+ 25% light till dawn |
|---|

| | |
|-------------|---------|
| Solar Panel | 60W,30V |
|-------------|---------|

| | |
|----------------|------------|
| Install height | 6~8 meters |
|----------------|------------|

Application:
Courtyard/Garden/ Park/Street/Roadway/pathway/Parking Lot/Private road/Sidewalk/Public square/ plaza/Campus/Airfield/Farm & Ranch/Perimeter Security/ Wildlife area/Remote Area/Military Base/High way/Government project for special use

| | |
|------------|-------|
| Waterproof | IP 65 |
|------------|-------|

| | |
|---------------------|--------------------------------|
| Solar charging time | 10-11 hours by bright sunlight |
|---------------------|--------------------------------|

| | |
|----------------------|----------------------|
| Lighting time | Over 3 nights |
|----------------------|----------------------|

| | |
|----------|-------------------------------|
| Material | Aluminium alloy + steel glass |
|----------|-------------------------------|

Packing details:
Carton size: L135*W25*H57 CM
QTY/CTNS: 1PC
G.W/CTNS: 34KG

| | |
|------|----------------|
| Size | 488*1300*117mm |
|------|----------------|

www.usaemergencysolarenergy.com PH+1-303-634-2208
 Fax: +1-303-634-2208 Email: sales@usaemergencysolarenergy.com

| | |
|----------|---------|
| Warranty | 3 years |
|----------|---------|

www.usaemergencysolarenergy.com
PH+1-303-634-2208
Fax: +1-303-634-2208 Email:
sales@usaemergencysolarenergy.com






www.usaemergencysolarenergy.com PH+1-303-634-2208 Fax: +1-303-634-2208 Email: sales@usaemergencysolarenergy.com



www.usaemergencysolarenergy.com
PH+1-303-634-2208
Fax: +1-303-634-2208 Email:
sales@usaemergencysolarenergy.com

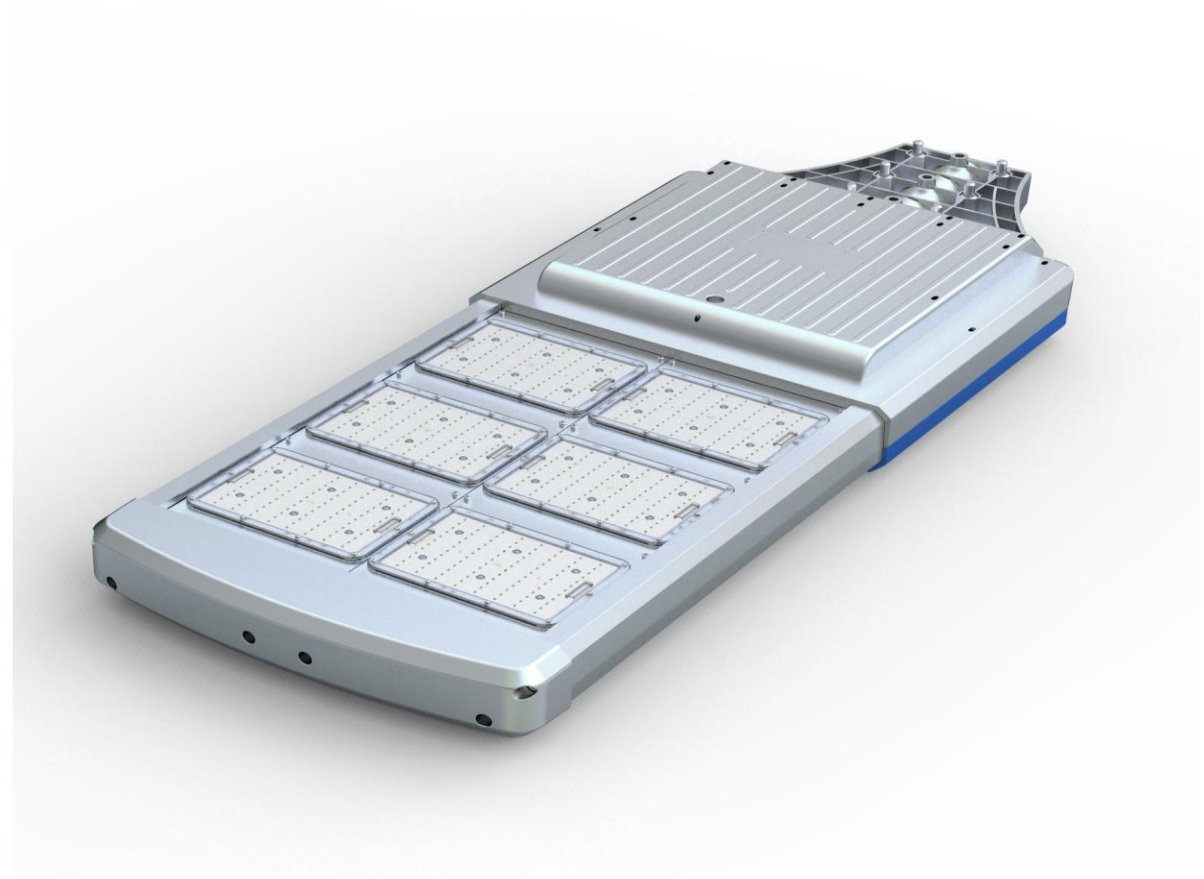

www.usaemergencysolarenergy.com
PH+1-303-634-2208
Fax: +1-303-634-2208 Email:
sales@usaemergencysolarenergy.com

- **PRODUCTS DETAIL**

-

Main Features:

- 1.Design: Solar panel, Battery, LED panel are all in One Integrated Design
- 2.Solar panel: High efficiency Glass Lamination panel
- 3.LED: High quality LED 120 lumen/W
- 4.Battery : A graded Li-ion battery No.18650
- 5.Lighting distribution: 2 times professional road lighting output
- 6.Waterproof: IP65


Material : Aluminum Alloy + Tempered Glass

www.usaemergencysolarenergy.com PH+1-303-634-2208

Fax: +1-303-634-2208 Email: sales@usaemergencysolarenergy.com

How is the light working?

- 1.Solar charging time: about 10Hrs by bright sunlight.
- 2.Auto off for sun charging in daytime, auto turn on light at night.
- 3.Lighting time: around 3 nights!
- 4.Energy saving, auto turn off in daytime and auto turn on at night, 5 hours always bright light, then turn to 25% dim light till dawn.

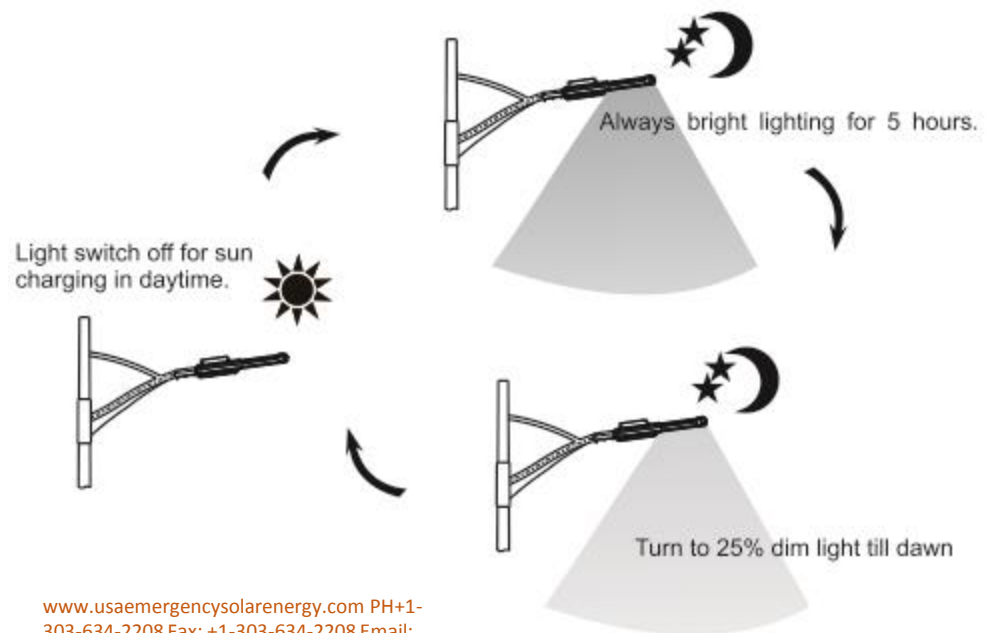

www.usaemergencysolarenergy.com PH+1-303-634-2208 Fax: +1-303-634-2208 Email: sales@usaemergencysolarenergy.com