

Model NO. : SML-04

Solar Pull switch Wall Light 1000 Lumens

High quality/Efficiency/Energy Saving

Application: Courtyard/Garden/ garage door/  
warehouse/stable/gateway/escape trunk/corridor etc.

Categories: **Solar Motion Wall Light**

[www.usaemergencysolarenergy.com](http://www.usaemergencysolarenergy.com) PH+1-303-634-2208

Fax: +1-303-634-2208 Email: [sales@usaemergencysolarenergy.com](mailto:sales@usaemergencysolarenergy.com)



[www.usaemergencysolarenergy.com](http://www.usaemergencysolarenergy.com) PH+1-303-634-2208  
Fax: +1-303-634-2208 Email:  
[sales@usaemergencysolarenergy.com](mailto:sales@usaemergencysolarenergy.com)

<b>Features:</b> <b>Aluminum Alloy Case, Separate Solar panel for outdoor easy mounting. 3.5 Meters cable.</b> <b>1000Lumens Super-bright LED light</b> <b>Replaceable and Rechargeable Li-ion Battery</b> <b>Sensitive PIR Motion Sensor</b> <b>100% Solar powered, Green energy, Green Light</b> <b>Waterproof IP65</b> <b>Adjustable bracket for lamp and solar panel for high efficiency</b> <b>Wide Lighting Area</b>		<b>price per unit</b>	<b>500 pcs</b>			
		<b>us\$94.35</b> <b>BUY NOW</b>	<b>us\$78.45</b> <b>BUY NOW</b>			
<b>LED</b>	<b>1000Lumens,6000K±500K</b>	<b>Lighting Mode</b>				
Li-ion battery	8000mAh 3.7V	<b>Dim lighting 50 lumens +motion sensor (Bright lighting 1000 lumens for 30secs when people move through the light)</b>				
Solar Panel	5W, 10years span life.					
Install height	2.5~3.5 meters	<b>Application:</b> <b>Courtyard/Garden/ garage door/ warehouse/stable/gateway/escape trunk/corridor etc</b>				
Waterproof	IP 65					
Solar charging time	9 hours by bright sunlight	<b>Packing details:</b> <b>Retail packaging 27.5*W13.5*H19 cm</b> <b>Carton size: L56*W29*H40 CM</b> <b>QTY/CTNS: 8 PCS</b> <b>G.W/CTNS: 17.9KG</b> <a href="http://www.usaemergencysolarenergy.com">www.usaemergencysolarenergy.com</a> PH+1-303-634-2208 Fax: +1-303-634-2208 Email: <a href="mailto:sales@usaemergencysolarenergy.com">sales@usaemergencysolarenergy.com</a>				
<b>Lighting time</b>						
Material	Aluminum Alloy Toughened glass					
Size	242.5*120.5*92mm					
Warranty	1 year					



[www.usaemergencysolarenergy.com](http://www.usaemergencysolarenergy.com) PH+1-303-634-2208

Fax: +1-303-634-2208 Email:

[sales@usaemergencysolarenergy.com](mailto:sales@usaemergencysolarenergy.com)



[www.usaemergencysolarenergy.com](http://www.usaemergencysolarenergy.com) PH+1-303-634-2208  
Fax: +1-303-634-2208 Email:  
[sales@usaemergencysolarenergy.com](mailto:sales@usaemergencysolarenergy.com)

[www.usaemergencysolarenergy.com](http://www.usaemergencysolarenergy.com)  
PH+1-303-634-2208  
Fax: +1-303-634-2208 Email:  
[sales@usaemergencysolarenergy.com](mailto:sales@usaemergencysolarenergy.com)



[www.usaemergencysolarenergy.com](http://www.usaemergencysolarenergy.com) PH+1-303-634-2208 Fax: +1-303-634-2208 Email: [sales@usaemergencysolarenergy.com](mailto:sales@usaemergencysolarenergy.com)



- **PRODUCTS DETAIL**

- 

Main Features:

1. Design: Solar panel, Battery, LED panel are all in One
2. Pull switch: adjust the brightness and lighting time
3. Solar panel: High efficiency monocrystalline silicon
4. LED: High quality LED 120 lumen/W
5. Battery: A graded Li-ion battery No.18650
6. PIR: Motion sensor distance 3M
7. Waterproof: IP65
8. Material : Aluminum Alloy + Tempered Glass

[www.usaemergencysolarenergy.com](http://www.usaemergencysolarenergy.com) PH+1-303-634-2208

Fax: +1-303-634-2208 Email: [sales@usaemergencysolarenergy.com](mailto:sales@usaemergencysolarenergy.com)



## Working process instructions

ON/OFF function:  
ON: Inter dim light + PIR  
OFF: turn off lighting system



Fix the lamp on the wall  
by the supplied screws




[www.usaemergencysolarenergy.com](http://www.usaemergencysolarenergy.com) PH+1-303-634-2208 Fax: +1-303-634-2208 Email: [sales@usaemergencysolarenergy.com](mailto:sales@usaemergencysolarenergy.com)

Step1: The lamp turn off for sun charging in daytime



Step2: The lamp turn on 1000LM high light for 30S delay when people come 3-5M near

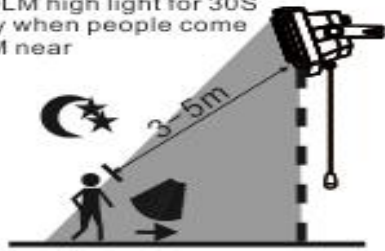

Step4: When in on situation, the pull switch function in below cycle:

1. Dim light +PIR 1000LM 30S
  2. 100%:1000LM
  3. 50%: 500LM
  4. OFF
- Four choices in cycle with memory function



Step3 : When people leave 3-5M away, it will turn on dim light again.

